ARCHITECTURAL FINISHES

REFURB WITH FILM

Looking for an alternative refurbishment solution?

Self-adhesive films could be a simple and cost-effective alternative for your interior design projects. Create faux finishes by wrapping existing surfaces, saving landfill and avoiding the disruption of traditional refurbishments.

Looking for an installer?

We have a growing network of fully trained applicators who will be able to supply and install your projects with confidence. This elite group of installers, from fit out, sign and graphics companies, all share the same mission, to be one of the first to uncover exceptional ways to renovate building interiors and exteriors and to tap into the growing market of architectural finishes.


Architextural, part of William Smith Group 1832 are stockists and trade suppliers of all architectural and building related films. Transform decor both inside and out, or solve glazing issues with solar and security window films.

With the largest stock of architectural films in the UK, you have access to hundreds of alternative self-adhesive surface options for your design projects.

Our fully trained and high quality installation network can wrap existing fixtures, fittings, furniture within bars, hotels, restaurants, retail or any commercial environment.

Surface. Designed.



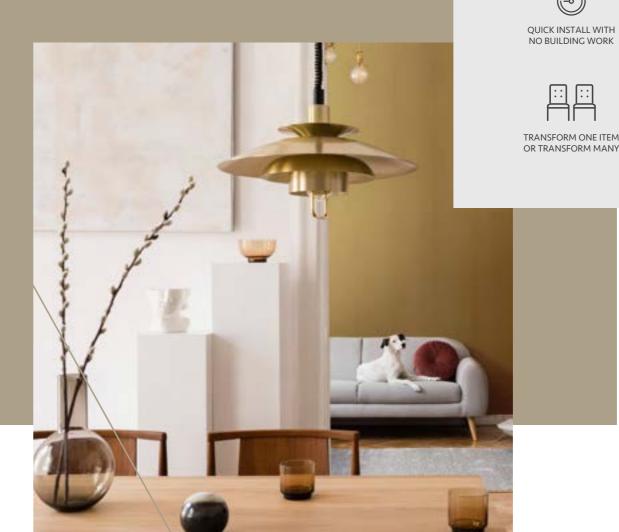



P

NO BUILDING WORK





NOT JUST FOR

FLAT SURFACES

NO LOSS OF REVENUE



INCREASE REVENUE FOR PREMIUM ROOMS



1500 REALISTIC TEXTURES AND PATTERNS



TRANSFORM ONE ITEM A SUSTAINABLE OR TRANSFORM MANY SOLUTION



FIRE TESTED, MOISTURE AND HEAT RESISTANT

THEY SAY THAT FORM FOLLOWS FUNCTION. WE SAY FORM **PRESERVES FUNCTION.**

WOOD FINISHES

\ 4





Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.




Suitable for external application



Not recommended for use on compound curves / stretching

W Overla

Overlaps preferred, splice joints not recommended

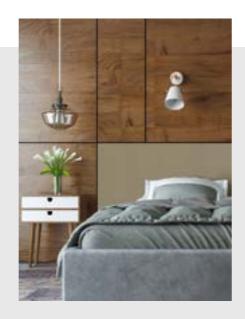

3M WOOD FINISHES **FW-1208** FW-7001 FW-1683 FW-1761 FW-788 FW-1765 FW-1138 FW-1307 **#** FW-789 🗰 FW-1766 FW-1130 FW-1129 FW-1745 FW-1981 FW-1256 FW-1289 **#** FW-327 FW-1285 FW-1293 FW-236 FW-1681 FW-1262 FW-1810 FW-1988 ₩ FW-1259 FW-1755 FW-1257 FW-1306 FW-1122 FW-1286 FW-1123 FW-1296 **FW-233** ₩ FW-795 **#** FW-1805 **#** FW-1278 **#** FW-888 FW-1734 * FW-237 FW-1125

WOOD FINISHES





3M ★ FW-1214EX ★ ● ● W FW-1122EX ★ ● ● W FW-233EX ★ ● ● W FW-887EX ★ ● ● W FW-887EX ₩ FW-1970 FW-1757 FW-1121HAR FW-324 FW-625EX 🗰 ! 🚾 FW-618EX 🗰 ! 🚾 MW-1244 MW-1418 MW-1833 MW-1832 MW-1834 MW-776 **#** MW-1419 ₩ WG-964 ₩ WG-1141 ₩G-166 MW-777 AE-2168 WG-1343 WG-1046 ₩ WG-478 ₩G-833 WG-1144 WG-832 WG-243 WG-2246 WG-2944 WG-1143 ₩ WG-1382 ₩G-841 WG-2705 WG-629 WG-765GN WG-865 WG-1837 WG-836

WOOD FINISHES

WOOD FINISHES











WOOD FINISHES

COLOUR FINISHES

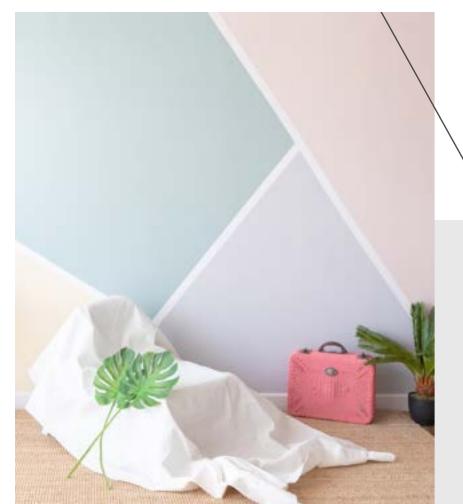

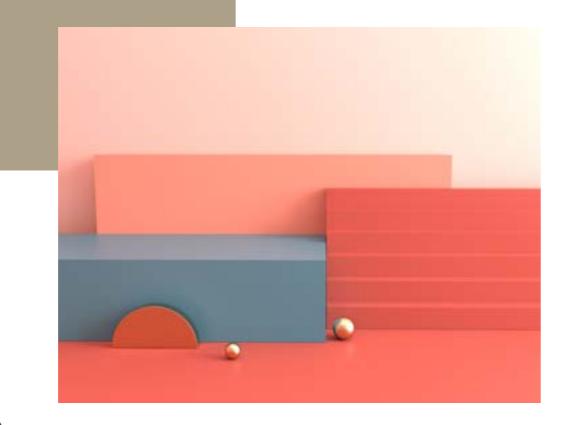

Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application



Not recommended for use on compound curves / stretching



Overlaps preferred, splice joints not recommended






COLOUR FINISHES

COLOUR FINISHES

₩ PS-1444 ₩ PS-141 ₩ PS-1821 PS-134 PS-1822 PS-912 PS-1443 ₩ PS-139 ***** PS-665 ***** PS-1447 🗰 PS-135 ₩ PS-914 PS-1010 PS-1446 ₩ PS-668 ₩ PS-506 ***** PS-1825 ₩ PS-140 PS-1826 PS-920 PS-1450 ₩ PS-1455 PS-1454 PS-121 PS-2060 PS-1823 PS-1457 PS-1824 ₩ PS-900 ₩ PS-1008 ***** PS-1009 ₩ PS-151 ***** PS-107 * PS-910 PS-1459

COLOUR FINISHES


3M

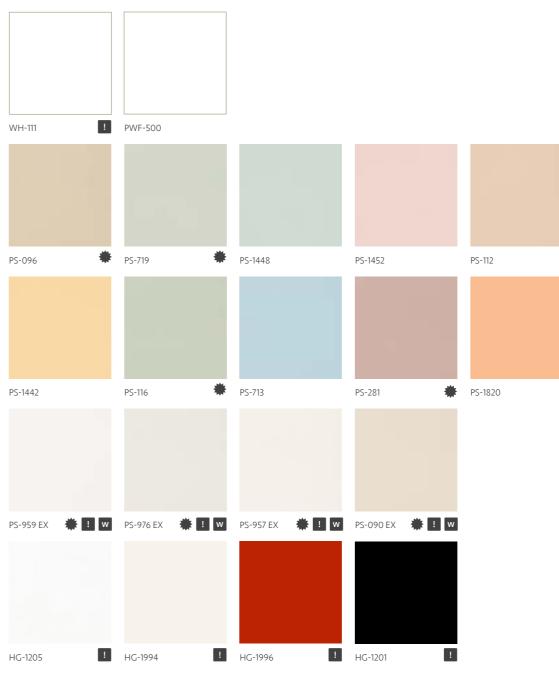

3M

COLOUR FINISHES

METALLIC FINISHES

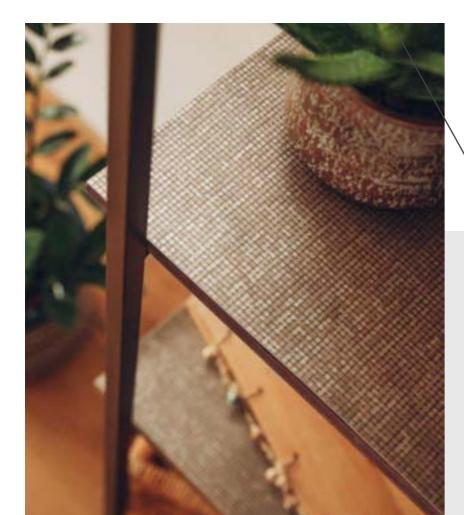



Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application




Not recommended for use on compound curves / stretching



Overlaps preferred, splice joints not recommended



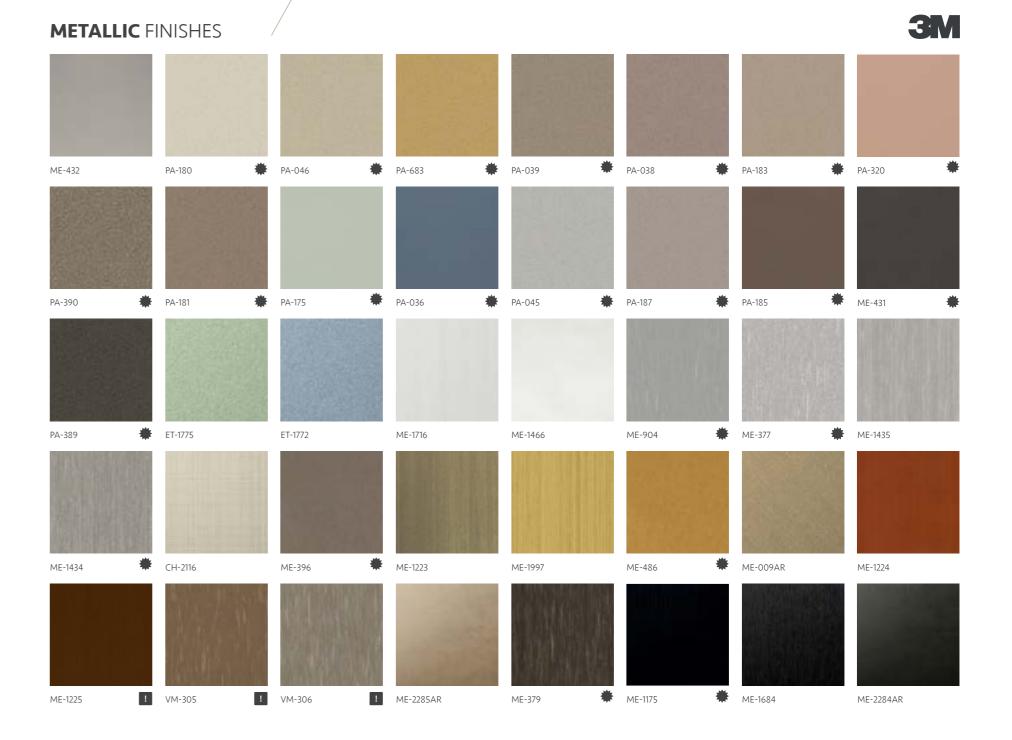

METALLIC FINISHES






3M METALLIC FINISHES ! VM-452 ! ME-147 ₩ ME-2024 VM-2034 ! AE-1643 ME-2022 ME-2020 ME-2023 ME-2027 LZ-462 ME-2026 FE-1964 FE-1966 FE-1967 LZ-461 PG-197 ₩ FA-592 🗰 RT-1112 🗰 RT-1111 🗰 FA-1531 FA-1161 VM-1855 MT ! VM-1862 MT PG-189 ***** CA-420 ***** CA-421 ***** TE-1650 CA-419 CA-418 TE-1652 TE-1653 ME-1467 AR PA-1854 EX 🏶 🗓 🚾 PA-187 EX 🏶 🗓 🚾 PA-039 EX 🏶 🖳 🚾 PA-038 EX 🏶 🗓 🚾 PA-181 EX 🏶 🖳 🚾 PA-389 EX 🏶 🛄 🚾 FA-1530EX 🏶 🛄 🐨

STONE FINISHES



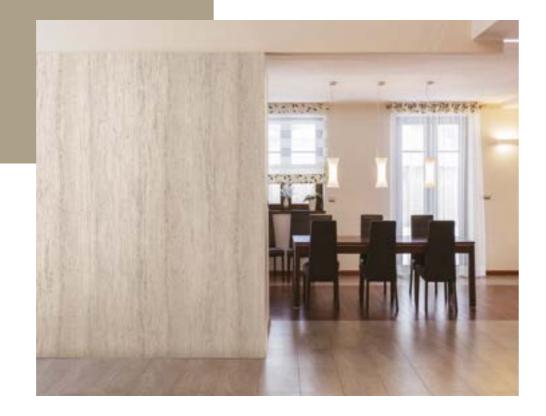

Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application



Not recommended for use on compound curves / stretching




Overlaps preferred, splice joints not recommended




STONE FINISHES

3M

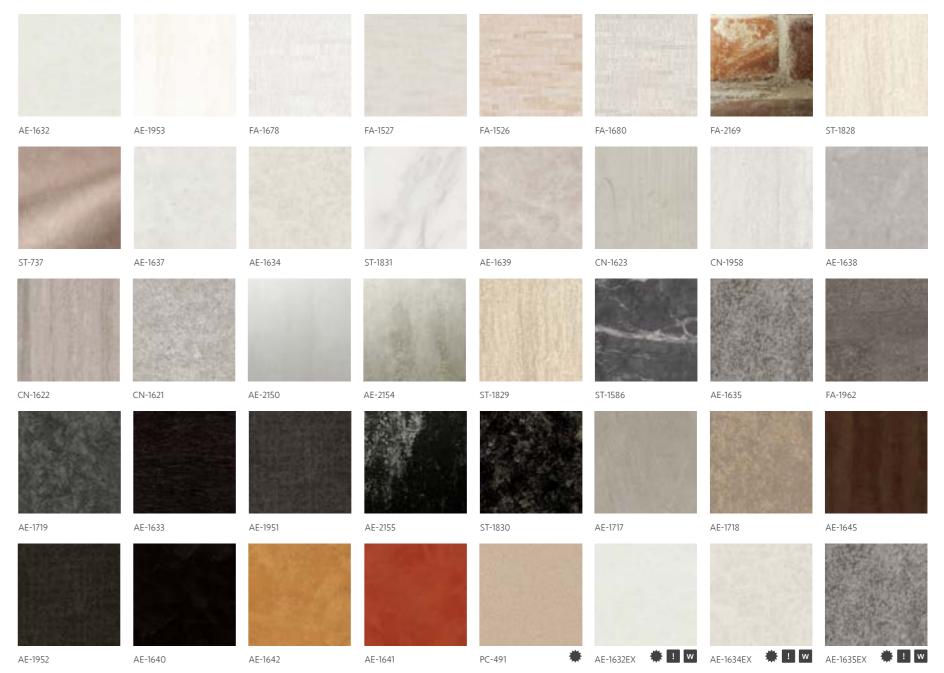


STONE FINISHES



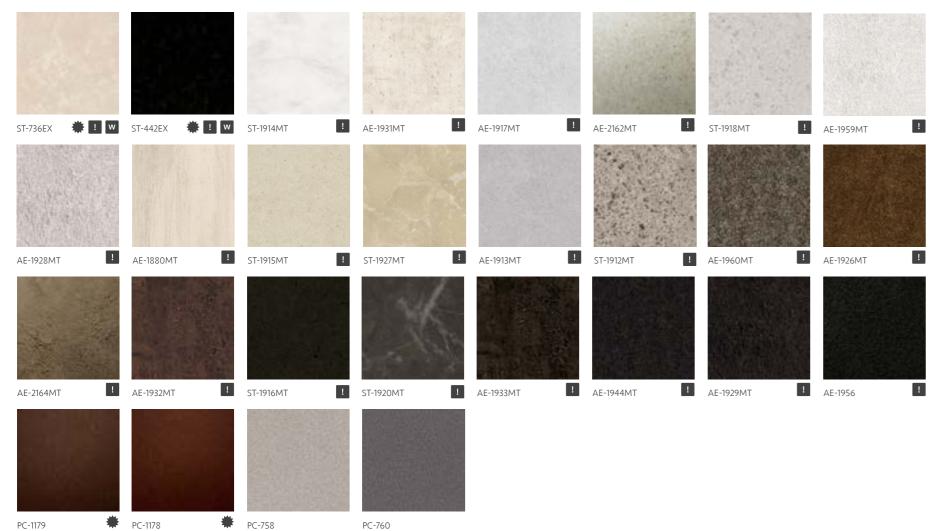

FABRIC FINISHES

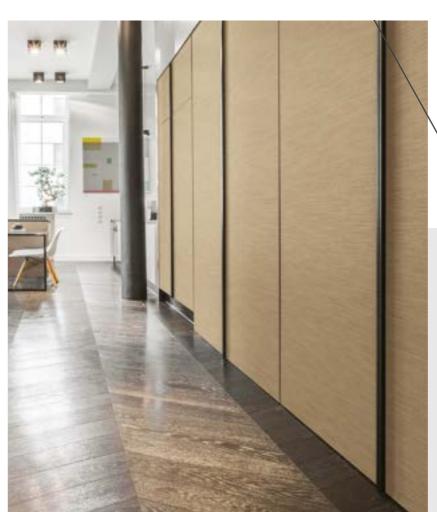



Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application



Not recommended for use on compound curves / stretching




Overlaps preferred, splice joints not recommended



FABRIC FINISHES



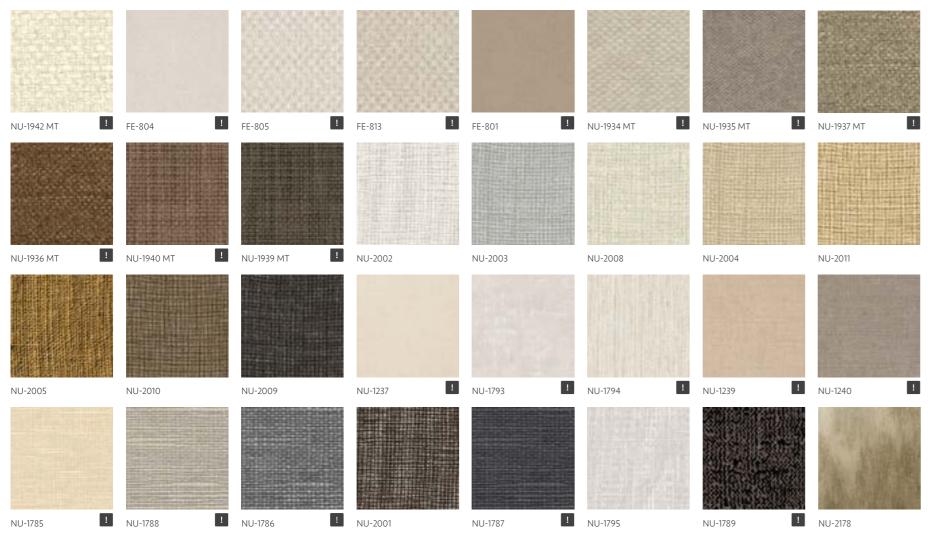



SI-1686

FABRIC FINISHES






FE-1731

FE-1732

FE-1730

LEATHER FINISHES

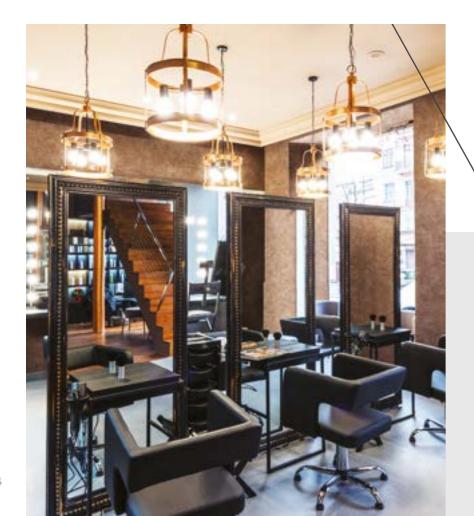



Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.




Suitable for external application



Not recommended for use on compound curves / stretching




Overlaps preferred, splice joints not recommended

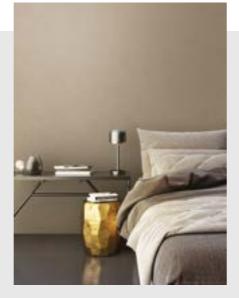





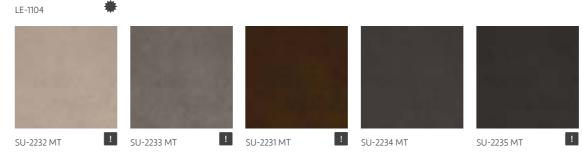

TECHNICAL SPECIFICATIONS

The use of architectural film has become more prevalent over the last few years as there has been a shift in attitude toward using sustainable solutions and methods within the construction sector.

Wrapping doors or case goods instead of ripping out and sending to landfill is a powerful statement for any stakeholders within a refurbishment scheme.

We recommend you discuss all technical considerations for your project with one of our skilled installation partners. Please contact us to organise a consultation or trial application with a member of our installation network







DURABILITY

Due to the number of finishes available, durability varies between patterns and brands. Cover Styl' finishes typically last 10 years, standard 3M DI-NOC has a durability of 5 years for exterior applications but up to 12 years for indoor use. The specialist exterior range however is expected to last 10 years+ ensuring protection against defects in fading, peeling, discoloration or loss of adhesion.

ABRASION RESISTANCE

Superior to many common wall surfaces such as paint/ wallpaper, an equivalent level of HPL. There are additional specialist ranges also available for high traffic areas, or where greater protection is sought.

IMPACT RESISTANCE

Performance is superior to many common wall surfaces such as paint/wallpaper. However, film surfaces can be dented if sufficient force is applied. Impact resistance is highly dependent on the strength of the substrate material onto which it is applied. As it is a vinyl, it offers a degree of cushioning on impact, where harder substrates such as laminates may crack with the same impact. However, the beauty of architectural film, is that any damage over its lifetime can be repaired with an invisible patch, without having to remove or replace any expensive panels.

CLEANING

Architectural films are made from durable PVC, meaning they are wipeable and practical. They are also resistant to staining by common substances e.g. food or household cleaners. Full technical spec sheets are available on request.

FIRE CERTIFICATION

Architectural films meet all building and IMO regulations with fire certifications available across the range. Should you require specific information by patterns, we can put you in touch with our technical department. Fire test results vary by finish and application substrate, with most classified as class B or C with low dripping and emissions.



