## **SCOVER STYL'** ARCHITECTURAL FINISHES

## REFURB WITH FILM

#### Looking for an alternative refurbishment solution?

Self-adhesive films could be a simple and cost-effective alternative for your interior design projects. Create faux finishes by wrapping existing surfaces, saving landfill and avoiding the disruption of traditional refurbishments.


#### Looking for an installer?


We have a growing network of fully trained applicators who will be able to supply and install your projects with confidence. This elite group of installers, from fit out, sign and graphics companies, all share the same mission, to be one of the first to uncover exceptional ways to renovate building interiors and exteriors and to tap into the growing market of architectural finishes.

#### Architextural. **UK'S LARGEST STOCKIST OF ARCHITECTURAL FILM BRANDS.**

**1000+** patterns now on our shelves More choice for your clients No more long lead times

See our full range of films; architextural.co.uk

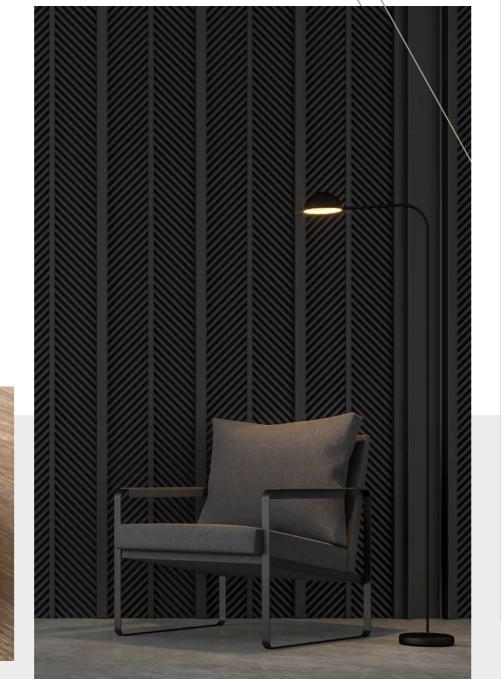

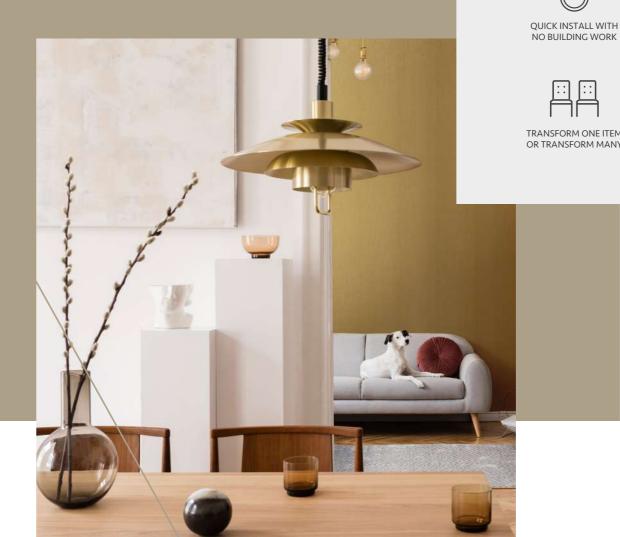





**P** 



NOT JUST FOR

FLAT SURFACES

NO LOSS OF REVENUE



INCREASE REVENUE FOR PREMIUM ROOMS

**%** 



1500 REALISTIC TEXTURES AND PATTERNS



TRANSFORM ONE ITEM OR TRANSFORM MANY

A SUSTAINABLE SOLUTION



FIRE TESTED, MOISTUR AND HEAT RESISTANT

THEY SAY THAT FORM FOLLOWS FUNCTION. WE SAY FORM **PRESERVES FUNCTION.** 

\ 4





Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application




Not recommended for use on compound curves / stretching

W Ov

Overlaps preferred, splice joints not recommended



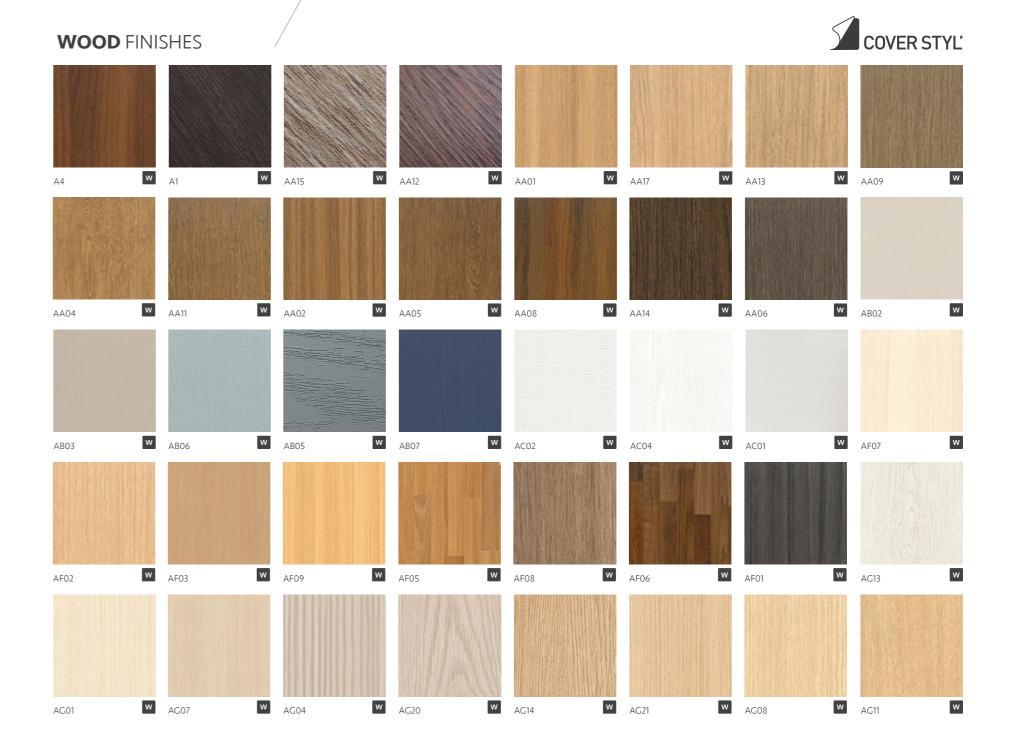

# WOOD FINISHES






COVER STYL'





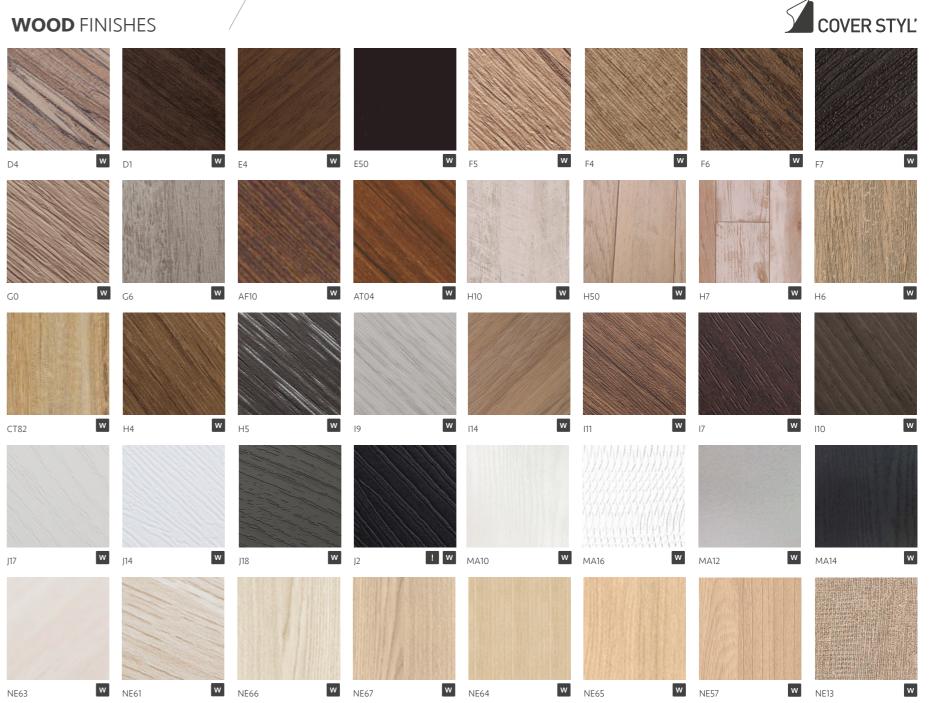

WOOD FINISHES






WOOD FINISHES							5	COVER S	TYĽ
NF35 W	NF45 W	NF80 W	NF48 <b>w</b>	NF89	<b>W</b> NF88	w	NF77 W	NF78	w
NF57 W	NF66 W	NF63 W	NF79 W	NF61	<b>w</b> NF43	w	NF94 w	NF47	w
						なななない			
NF37 W	NF39 W	NF90 W	NF91 W	NF92	W NF67	w	NF82 W	NF65	w
NF81	NF68 ! W	NF50			W NF33	w	NF59		w
NF81 W	NF68 ! W	NF50 W	NF95	NF51	W NF33	vv	NF59 W	NF93	v
NF70	NF55 <b>W</b>	NF49 W	NF83	NF56	₩ NF84	w.	NF69 W	NF54	w

# WOOD FINISHES





## **COLOUR** FINISHES

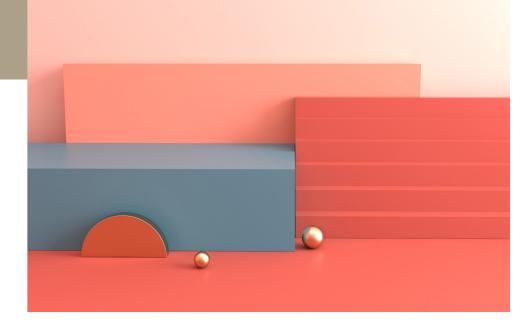

Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application



Not recommended for use on compound curves / stretching






#### **COLOUR** FINISHES





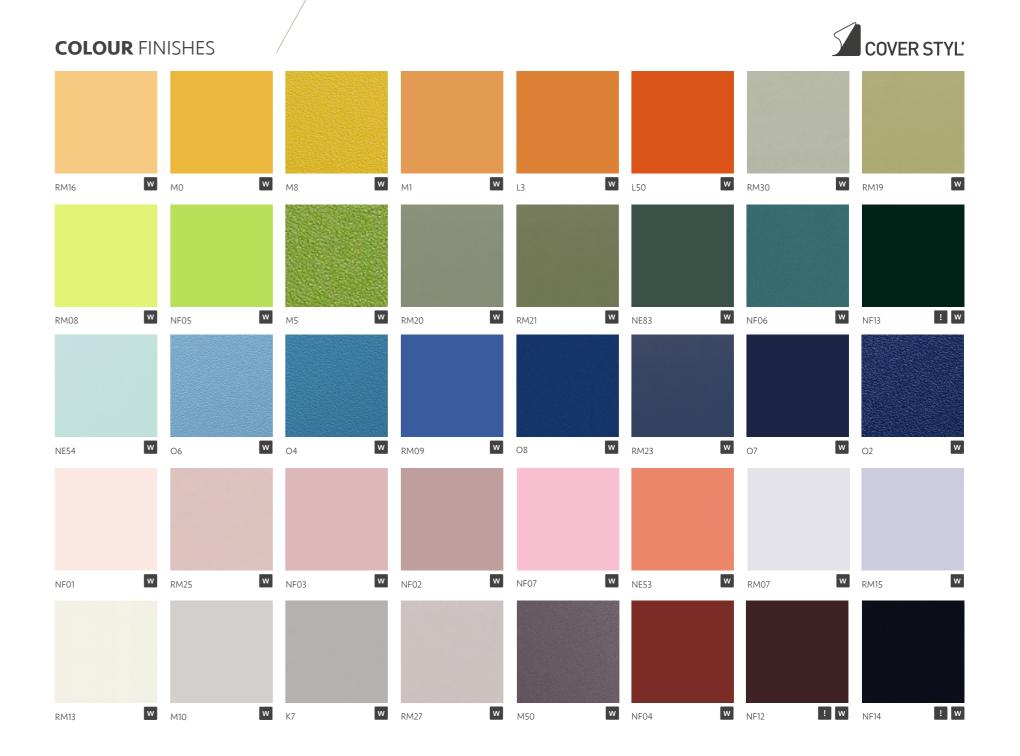


#### **COLOUR** FINISHES





## **METALLIC** FINISHES

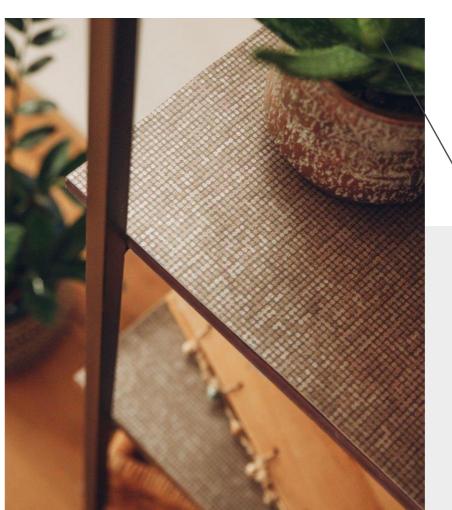



Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application




Not recommended for use on compound curves / stretching





#### **METALLIC** FINISHES

COVER STYL'

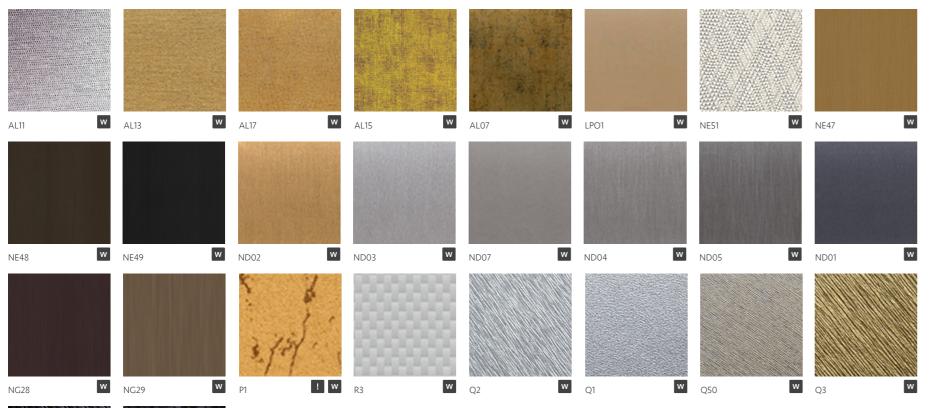




18

## **STONE** FINISHES



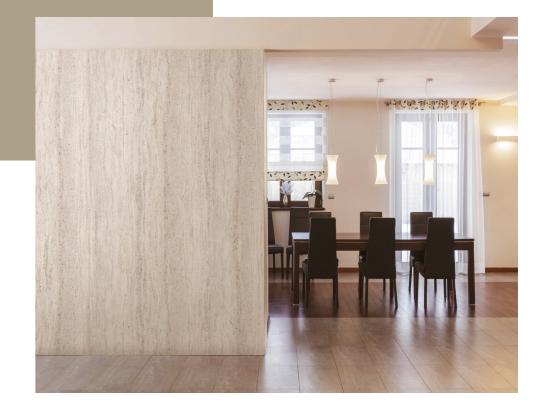

Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application




Not recommended for use on compound curves / stretching






#### **STONE** FINISHES

COVER STYL'

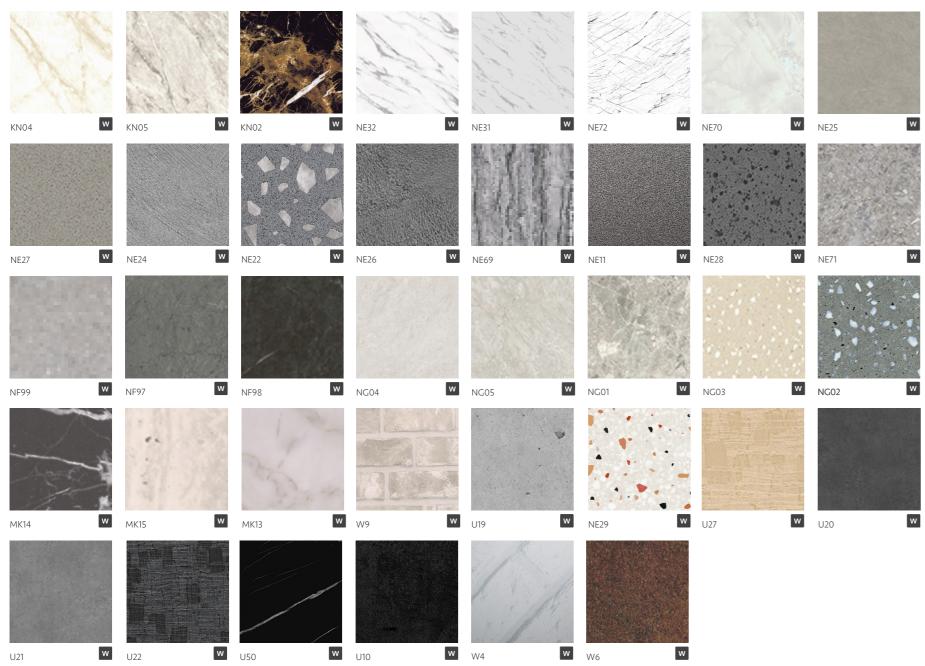

## FABRIC FINISHES

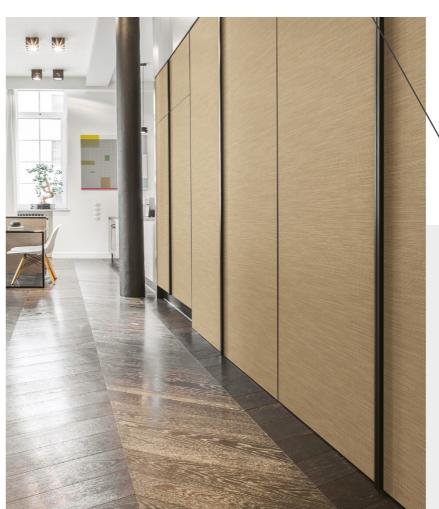



Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application



Not recommended for use on compound curves / stretching






#### FABRIC FINISHES





## **LEATHER** FINISHES



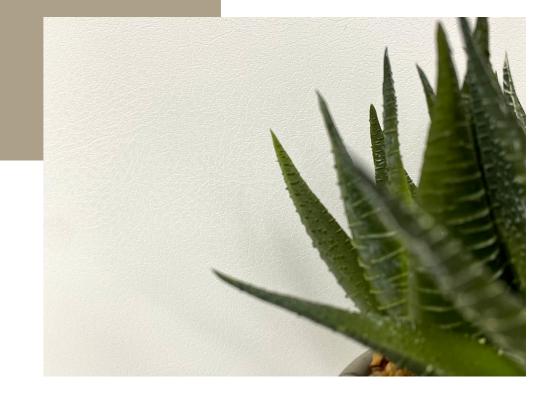

Performance varies dependent upon individual pattern construction. Please cross reference the symbols below each finish for application considerations.



Suitable for external application




Not recommended for use on compound curves / stretching






#### **LEATHER** FINISHES



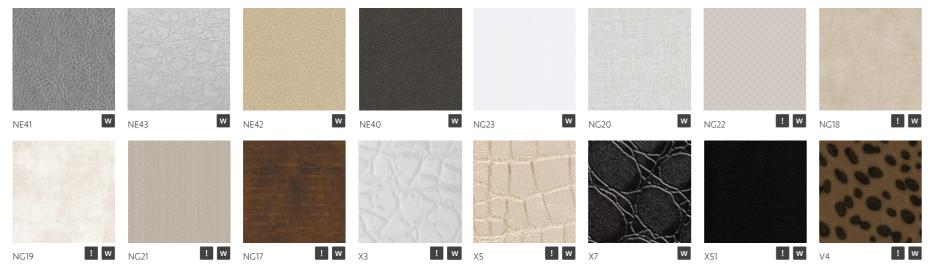



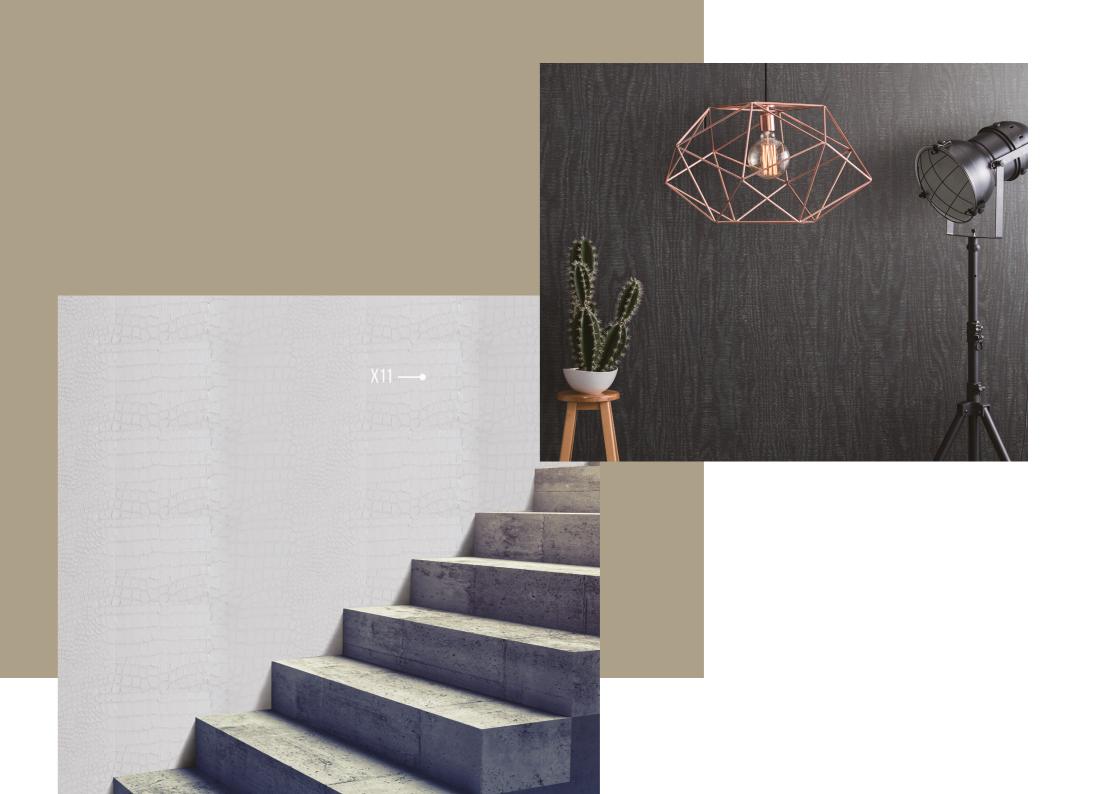

### **TECHNICAL** SPECIFICATIONS

The use of architectural film has become more prevalent over the last few years as there has been a shift in attitude toward using sustainable solutions and methods within the construction sector.

Wrapping doors or case goods instead of ripping out and sending to landfill is a powerful statement for any stakeholders within a refurbishment scheme.

We recommend you discuss all technical considerations for your project with one of our skilled installation partners. Please contact us to organise a consultation or trial application with a member of our installation network







#### DURABILITY

Due to the number of finishes available, durability varies between patterns and brands. Cover Styl' finishes typically last 10 years, standard 3M DI-NOC has a durability of 5 years for exterior applications but up to 12 years for indoor use. The specialist exterior range however is expected to last 10 years+ ensuring protection against defects in fading, peeling, discoloration or loss of adhesion.

#### **ABRASION RESISTANCE**

Superior to many common wall surfaces such as paint/ wallpaper, an equivalent level of HPL. There are additional specialist ranges also available for high traffic areas, or where greater protection is sought.

#### IMPACT RESISTANCE

Performance is superior to many common wall surfaces such as paint/wallpaper. However, film surfaces can be dented if sufficient force is applied. Impact resistance is highly dependent on the strength of the substrate material onto which it is applied. As it is a vinyl, it offers a degree of cushioning on impact, where harder substrates such as laminates may crack with the same impact. However, the beauty of architectural film, is that any damage over its lifetime can be repaired with an invisible patch, without having to remove or replace any expensive panels.

#### CLEANING

Architectural films are made from durable PVC, meaning they are wipeable and practical. They are also resistant to staining by common substances e.g. food or household cleaners. Full technical spec sheets are available on request.

#### **FIRE CERTIFICATION**

Architectural films meet all building and IMO regulations with fire certifications available across the range. Should you require specific information by patterns, we can put you in touch with our technical department. Fire test results vary by finish and application substrate, with most classified as class B or C with low dripping and emissions.



